
INSTALLATION DRAWING · CONTACT LAMELLAE

# High-current contact band 12 mm

Dimensions of the 12 mm high-current contact band: a carrier strip of stainless spring steel with riveted contact pieces of silver-plated copper. Groove dimensions for round and flat contacts are in the datasheet.

SCHEMATIC, DIMENSIONS IN MM

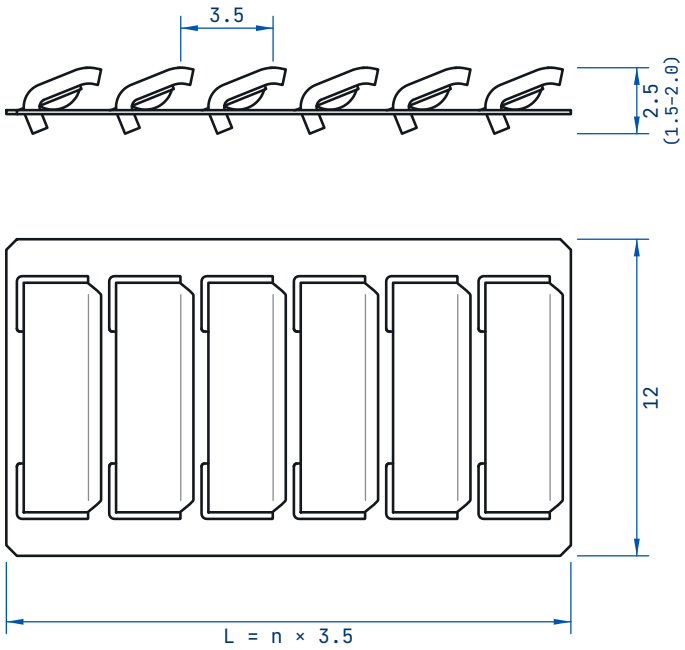


Side view with unloaded height 2.5 mm and working point 1.5–2.0 mm, top view with 3.5 mm pitch, band length L = n × 3.5 and width 12 mm.

## DIMENSIONS

| | | |
|---|---|---|
| Carrier strip | stainless spring steel | |
| Contact piece | copper, silver-plated | |
| Width | 12 | mm |
| Pitch | 3.5 | mm |
| Band length L | n × 3.5 (n = number of contacts) | mm |
| Unloaded height | 2.5 | mm |
| Working point (installation height) | 1.5–2.0 | mm |

**DRAWING** Dimensions in mm. English edition of the German installation drawing of ACA Atlas Contacte (2017), drawn with the same dimensions, schematic and not to scale. German original (PDF) · Product page and configurator

**Note:** Subject to technical change. Only the drawings and specifications agreed with you are binding. © ACA Atlas Contacte GmbH, 2026-11.

**ACA Atlas Contacte GmbH** · Wallbacher Straße 5 · 79664 Wehr · Germany
Phone +49 7761 4420 · info@atlas-contacte.de · www.atlas-contacte.de